










## Tough quality product

The Novopress pressing unit AFP202 meets all requirements to a reliable, robust and durable tool. On the basis of the pressing units EFP1 and EFP2, which are well-known and successful since 1978, the AFP202 has a pistol style design and lies safe and comfortably in your hands. The constant and reliable pressing force and the defined stroke meet the criteria for a compatible pressing unit. According to the Novopress quality standard, the AFP202 of course has an automatic retraction and a mechanical safety mechanism of the jaw-retention-bolt. You can choose between two powerful battery types, to live up to expectations.

-  Metal pipe up to 54 (108 mm)  
Plastic pipe up to 110 mm
-  Rechargeable battery
-  Rotatable head



### Advantages:

-  Robust design
-  Automatic back stroke
-  Easy handling
-  Rotatable head

## Basic-Line Pressing Unit AFP202

After a successful completed pressing cycle the piston will return in its start position and is ready for the next press job without any manual conversion. For this reason and thanks to the short pressing cycles a fast and economic working is provided.

Before the beginning of the fitting deformation, the pressing cycle can be interrupted by releasing the start button. After the power build-up on the jaw, the piston will not return in the start position until the pressing cycle is completed - for a maximum of pressing safety. In case the pressing cycle needs to be interrupted, a release button can be actuated, for an immediately stop of the piston stroke.

The pressing unit AFP202 can be used with all compatible Novopress press jaws produced since 1972, forming a reliable whole.




### Technical Data AFP202

Dimensions:	up to 54 mm metal pipe (depending on system up to 108 mm) / up to 110 mm plastic pipe
Weight incl. battery:	3.9 kg
Length:	385 mm
Width:	85 mm
Height:	240 mm
Power consumption:	450 W
Piston force:	32 kN
Piston stroke:	40 mm
Battery: (alternative)	14.4 V / 2.0 Ah NiCd 18 V / 3.0 Ah Li-Ion
Battery capacity:*	55 - 110 press cycles
Charging time:*	ca. 65 - 100 Min.

\* depending on material, dimension and battery type

Battery 2.0 Ah NiCd / 3.0 Ah Li-Ion

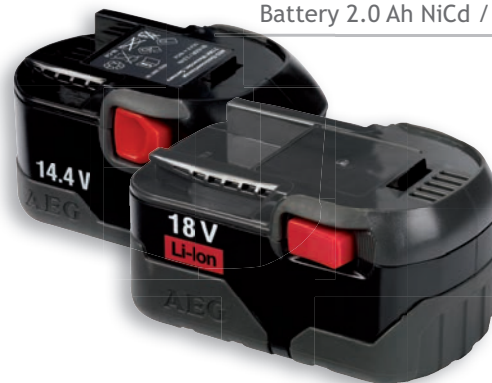

Subject to technical changes.

# novopress

Novopress GmbH & Co. KG  
Scharnhorststraße 1 · D-41460 Neuss  
Tel.: +49(0)2131-288-0 · Fax: +49(0)2131-288-55  
www.novopress.de · E-Mail: verkauf@novopress.de